

# Combi setting tool Flipper® Plus

One setting tool – two functions

**NEW**



**Virtually tool-free conversion from blind rivet to blind rivet nut setting tool**

**Working range blind rivets**  
Blind rivets up to 5 mm Ø aluminium and 4 mm Ø steel and stainless steel

**Working range blind rivet nuts**  
Blind rivet nuts from M4 up to M6 aluminium as well as from M4 up to M5 steel

**Technical data**  
Weight: 750 g  
Total length: 217 mm  
Total stroke: 16.2 mm  
Single action stroke: 1.8 mm

**Accessories**  
Nosepieces: 12/20, 12/24, 12/29, 12/M4, 12/M5 and 12/M6  
Threaded mandrel conversion kit: M4, M5 and M6  
1 maintenance wrench, 1 Allen key  
1 jaw insertion aid  
Operating instructions with spare parts list



Art.-Nr. 157 1258

**Shared advantages**


- New ratchet function
- The force increases when the handle is closed. This finding is put to good use in a special lever arrangement for setting blind rivets and blind rivet nuts: ergonomic design
- The required manual force is reduced by around 40 percent if actuated several times.
- Actuation lever with an opening spring for easy single-handed operation

**Advantages when setting blind rivets**

- Jaw mechanism with spring reset for safe and automatic mandrel ejection
- Rivet mandrel collection container can be clipped to the body casing and is easy to empty
- Larger device lift: a benefit when handling extra long blind rivets

**Advantages when setting blind rivet nuts**

- The total stroke is 16.2 millimeter long for setting of new generation multigrip blind rivet nuts like the GESIPA® PolyGrip® blind rivet nuts
- Simplified setting procedure for blind rivet nuts

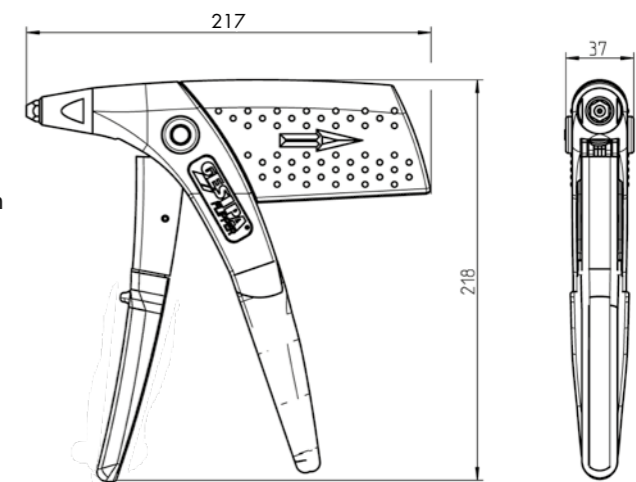

Dimensions in mm

## Converted in under 1 minute in just a few simple steps

**1. Removal**

Remove the parts shown in the image



**2. Installation**

Install the threaded mandrel and nosepiece



**3. Converted**

Converted to a blind rivet nut setting tool

